




## POWER & EFFICIENCY

INPUT POWER OPTIONS	AC 1PH 200-240V 50/60Hz   AC 3PH 200-240V 50/60Hz   AC 3PH 380-480V 50/60Hz		
CURRENT AT MAX SPEED (Amp)	3.53 A		1.73 A   1.48 A
POWER (hp)	0.9 HP BLDC Motor		
MAXIMUM SPEED (RPM)	76 RPM		
MAX AFFECTED AREA	105 ft Dia   11,000 sqft		

## DIMENSIONS & WEIGHT

FAN DIAMETER	20 ft
FAN WEIGHT	141 lbs (64 kg)

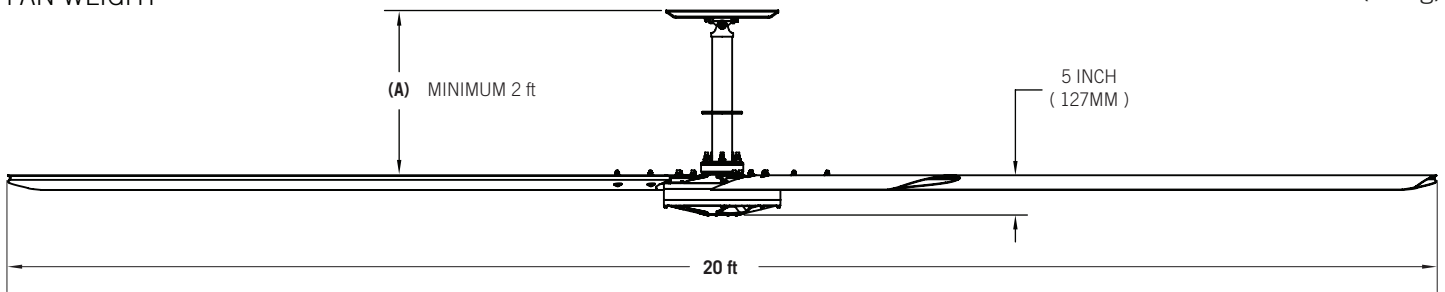

Pictured with 2 ft downrod

## MOUNTING & SAFETY

MOUNTING OPTIONS	I-beam   Glulam
DOWNROD (A)	Downrods available in 1 ft increments: 2 ft min., 10 ft max. <b>Downrod length must be specified at time of order.</b>
SAFETY FEATURES	Fan Retention System   Airfoil Retention System   Fire Relay

## IN THE BOX

INCLUDED	Fan I-beam mount with pre-wired downrod   Control panel   Install manual Mounting hardware kit   Communication Kit   Guy wire kit
OPTIONAL	Additional cable lengths   Glulam brackets   BMS Integration   Fire Relay

## WARRANTY & CERTIFICATIONS

CERTIFICATIONS	ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America
WARRANTY <sup>1</sup>	Limited 5-Year Warranty

<sup>1</sup>See complete warranty for details.

