



Hunter®

DDI


24

POWER & EFFICIENCY

INPUT POWER OPTIONS	AC 1PH 200-240V 50/60Hz AC 3PH 200-240V 50/60Hz AC 3PH 380-480V 50/60Hz		
CURRENT AT MAX SPEED (Amp)	2.9 A		1.51 A 1.31 A
POWER (hp)	0.9 HP BLDC Motor		
MAXIMUM SPEED (RPM)	61 RPM		
MAX AFFECTED AREA	115 ft Dia 13,000 sqft		

DIMENSIONS & WEIGHT

FAN DIAMETER	24 ft
FAN WEIGHT	150 lbs (68 kg)

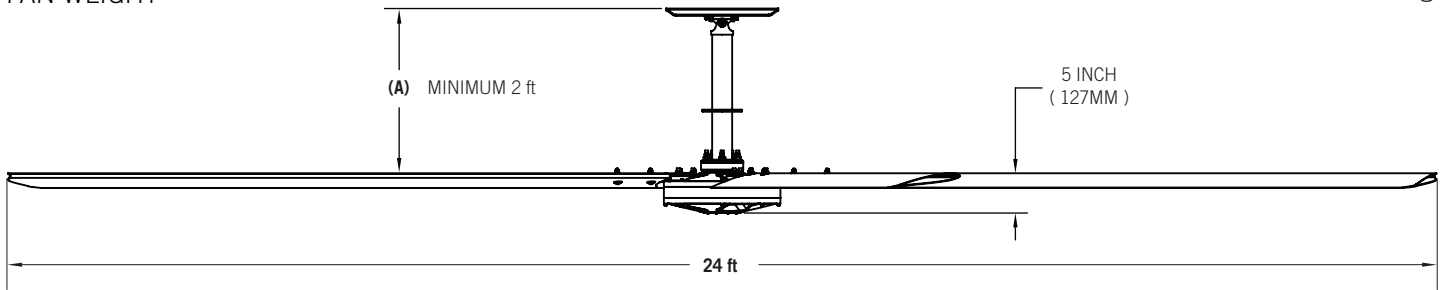

Pictured with 2 ft downrod

MOUNTING & SAFETY

MOUNTING OPTIONS	I-beam Glulam
DOWNROD (A)	Downrods available in 1 ft increments: 2 ft min., 10 ft max. Downrod length must be specified at time of order.
SAFETY FEATURES	Fan Retention System Airfoil Retention System Fire Relay

IN THE BOX

INCLUDED	Fan I-beam mount with pre-wired downrod Control panel Install manual Mounting hardware kit Communication Kit Guy wire kit
OPTIONAL	Additional cable lengths Glulam brackets Fire Relay

WARRANTY & CERTIFICATIONS

CERTIFICATIONS	ETL/Intertek-certified to ANSI/UL 507 and CSA C22.2 No. 113 in North America
WARRANTY ¹	Limited 5-Year Warranty

¹See complete warranty for details.

